


Genie® GTH™ -1056



Specifications

Models		GTH-1056	
Measurements		US	METRIC
Maximum lift height		56 ft 7 in	17.25 m
Maximum forward reach		42 ft	12.80 m
A	Height, stowed	8 ft 6 in	2.59 m
B	Length, stowed (without forks)	22 ft 6 in	6.86 m
Width		8 ft 6 in	2.59 m
C	Wheelbase	11 ft 6 in	3.50 m
D	Ground clearance, center	1 ft 3 in	0.38 m
E	Ground clearance, axle	1 ft 6 in	0.46 m
Fork cross section		2.25×4 in	57×101 mm
Productivity			
Maximum lift capacity		10,000 lb	4,536 kg
Lift capacity at maximum height		5,000 lb	2,268 kg
Lift capacity at maximum reach		3,000 lb	1,361 kg
Raise/Lower boom		15/12 sec	
Extend/Retract		23/30 sec	
Drive speed		15 mph (74hp PS)	24 km/h (74hp PS)
		18 mph (121hp PS)	29 km/h (121hp PS)
Draw bar pull		23,000 lb (74hp PS)	10,433 kg (74hp PS)
		25,000 lb (121hp PS)	11,340 kg (121hp PS)
Frame leveling (side to side)		10°	
Turning radius, outside (4WS)		14 ft	4.27 m
Auxiliary hydraulic flow		2-15 gpm	7.6-56.8 lpm
Auxiliary hydraulic pressure		3,170 psi	220 bar
Tires, standard size		Genie Enduro A/T 400/75-28	
Power			
Power source		Deutz TCD 3.6	
Electrical system voltage		12V	
Alternator		95 amp	
Battery		1000 CCA 0°F (-18°C)	
Hydraulic tank capacity		27 gal	102.2L
Hydraulic system capacity (w/tank)		52 gal	189.2L
Fuel tank capacity		30 gal	113.6L
Weight			
Weight*		31,900 lb	14,470 kg

Range of motion GTH-1056 with stabilizers up

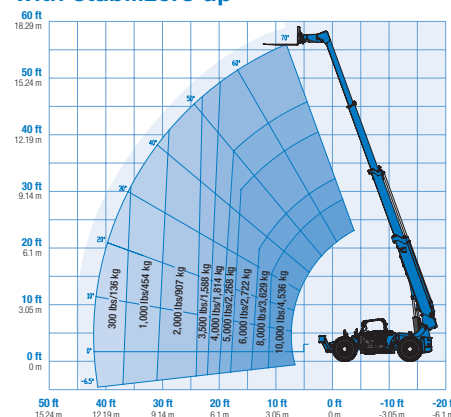

Range of motion GTH-1056 with stabilizers down

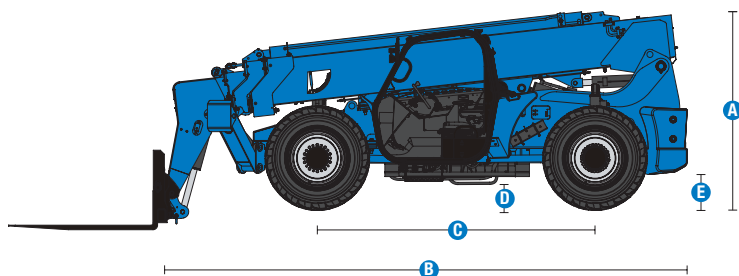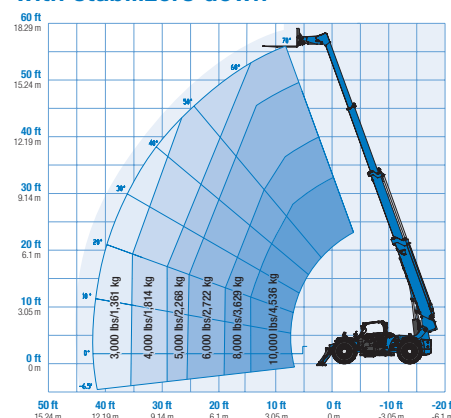

(1) Weight will vary depending on options and/or country standards.
(2) Load ratings vary depending on attachment.

Genie® GTH™-1056

EOC: Easy Order Configurations

- **GTH1056 EOC 1.0:** Cab with A/C, 74hp Deutz T4f, Worklights, Std Battery & Beacon
- **GTH1056 EOC 2.0:** Cab with A/C, 74hp Deutz T4f, Roadlights, Fenders, Std Battery & Beacon
- **GTH1056 EOC 3.0:** Canopy, 74hp Deutz T4f, Worklights, Std Battery & Beacon
- **GTH1056 EOC 4.0:** Canopy, 74hp Deutz T4f, Roadlights, Fenders, Std Battery & Beacon
- **GTH1056 EOC 5.0:** Cab with A/C, 121hp Deutz T4f, Roadlights, Fenders, Std Battery & Beacon
- **GTH1056 EOC 6.0:** Canopy, 121hp Deutz T4f, Roadlights, Fenders, Std Battery & Beacon

Option availability		EO	FtO	BtO
Cab	Cab ROPS/FOPS canopy	✓	✓	✓
	Closed cab: AC, heater, defrost, wipers, washer, split door	✓	✓	✓
	Backup alarm	✓	✓	✓
	Front and top glass		✓	✓
	Rear Proximity Alarm		✓	✓
	Rear proximity alarm with back-up camera and display		✓	✓
	3in/7.6cm high visibility red retractable seat belt	✓	✓	✓
	Adjustable suspended seat	✓	✓	✓
	Full gauge cluster with engine diagnostics	✓	✓	✓
	Fully proportional hydraulic boom controls	✓	✓	✓
	Machine level indicator	✓	✓	✓
	Mirrors - LH canopy mounted and RH chassis mounted	✓	✓	✓
	Multi-function joystick controller	✓	✓	✓
Chassis	74 hp, Deutz TCD 3.6, T4f, Side-mounted engine	✓	✓	✓
	121 hp, Deutz TCD 3.6, T4f, Side-mounted engine	✓	✓	✓
	Powershift transmission (PS) 3-speed 74 hp	✓	✓	✓
	Powershift transmission (PS) 4-speed 121 hp	✓	✓	✓
	Telematics-ready	✓	✓	✓
	Flashing beacon	✓	✓	✓
	Work lights: High output LED cab, boom, rear	✓	✓	✓
	Road and work lights: High output LED front, cab, boom, rear	✓	✓	✓
	Fenders set of four	✓	✓	✓
	Electric block heater		✓	✓
	Lift Connect Telematics		✓	✓
	Lift Connect with Access Manager upgrade		✓	✓
	Foam-filled Enduro A/T tires	✓	✓	✓
	Solid rough terrain tires		✓	✓
	Air-filled Enduro A/T tires		✓	✓
	Non-marking, foam-filled Enduro A/T tires		✓	✓
	Stabilizers, twin front mounted	✓	✓	✓
	3-mode power steering (2-wheel, 4-wheel coordinated and crab)	✓	✓	✓
	Frame leveling +/- 10 degrees	✓	✓	✓
	Full time 4WD with front and rear limited slip differential (LSD)	✓	✓	✓
Boom	Internal multiple wet disc brakes	✓	✓	✓
	Rear axle stabilizing system	✓	✓	✓
	Spring applied, hydraulic release parking brake	✓	✓	✓
	Tilt steering wheel	✓	✓	✓
	Genie manual Quick-Attach (QA) system	✓	✓	✓
	Auxiliary hydraulic circuit (15 GPM)	✓	✓	✓
	Boom angle indicator	✓	✓	✓
	Lifting shackle at boom tip	✓	✓	✓
	Self-leveling fork frame	✓	✓	✓

- EO Easy Order
■ FtO Finish to Order
■ BtO Build to Order




Side Mounted Engine



Lift Shackle



Long Life Tires

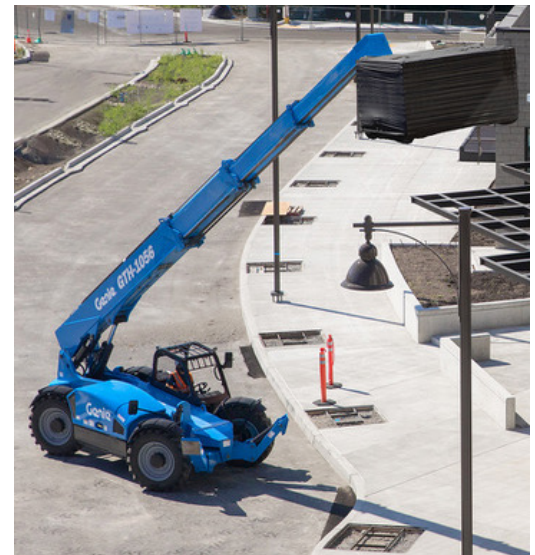

GTH Attachments

- QA Bucket 1.5cu.yd/1.15cu.m, 96in / 2.44m
- QA Carriage 48in / 1.2m, 60in / 1.5m, 72in / 1.8m
- QA Fork positioner carriage 48in / 1.2m
- QA Side shift carriage 48in / 1.2m
- QA Rotate carriage 48in / 1.2m, 60in / 1.5m, 72in / 1.8m
- QA Swing carriage 72in / 1.8m
- QA Truss boom, adjustable, 8ft/2.44m to 13ft/4m
- Cubing tines 48in (2x2x48in)/(.05x.05x1.2m) x 6
- Tapered fork tines 60in (2x5x60in)/(.05x.13x1.5m) x 2
- Lumber forks 60in (1.75x7x60in)/(.04x.18x1.5m) x 2
- Pallet forks 48in (2x4x48in)/(.05x.1x1.2m) x 2
- Pallet forks 60in (2x4x60in)/(.05x.1x1.5m) x 2
- Pallet forks 72in (2x4x72in)/(.05x.1x1.8m) x 2
- Pallet forks 96in (2x5x96in)/(.05x.13x2.4m) x 2

Product specifications are subject to change without notice or obligation. Photographs and/or drawings herein are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on proper equipment use. Failure to follow instructions in the Operator's Manual may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Terex, Genie, Quality By Design, Xtra Capacity, Lift Power, Lift Guard, Lift Tools, Lift Connect and Tech Pro Link are registered trademarks of Terex Corporation or its subsidiaries.

07/26

